

4" Square Dial Industrial Tridicator

Bottom and Rear Connection



► Applications

Dual reading temperature & pressure these instruments are commonly used on commercial and industrial boilers. These are available in bottom or lower back connections.

► Specifications


Accuracy	1% Full Scale per Grade 1A ASME B40.1
Case	Black steel painted
Dial	4"
Lens	Glass
Stem Length	2"
Scale	psi/kPa celcius/fahrenheit
Connection	1/2" NPT copper alloy



Front view



Back view

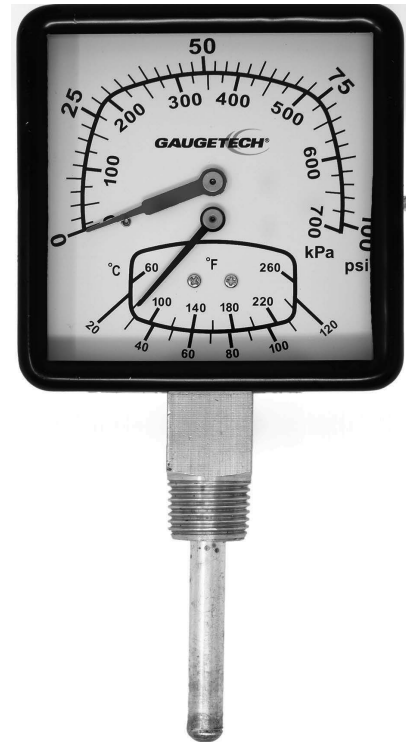

► How to order

Model	Connection	Range
GTTRI-75B	Back	0-75 Psi/Kpa 60-260 F&C
GTTRI-100B	Back	0-100 Psi/Kpa 60-260 F&C
GTTRI-200B	Back	0-200 Psi/Kpa 80/320 F&C
GTTRI-75L	Bottom	0-75 Psi/Kpa 60-260 F&C
GTTRI-100L	Bottom	0-100 Psi/Kpa 60-260 F&C
GTTRI-200L	Bottom	0-200 Psi/Kpa 80/320 F&C